



Operation




Engage



Lock



It's connected!

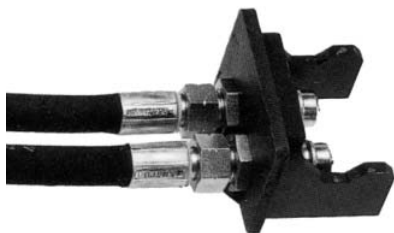


Socket


Mach 2

Mach 4

Mach 7

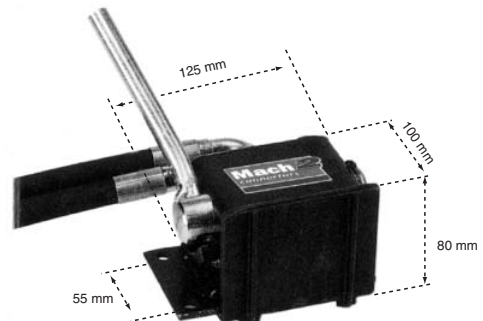


Box

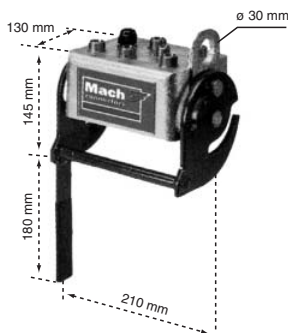

«Bell» Upper Part

Contains the female couplers and the locking system.




«Base» Lower Part

Contains the male couplers protected by an automatically closing flap.

Fixing the base

Use four screws M8 x 25mm into original tapped holes.

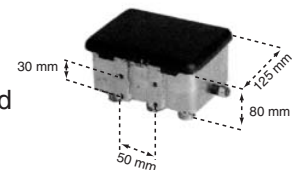

Overflow bottle

To collect oil and avoid all pollution.



Electrical Connector

- Number of contacts: 6
- Service intensity: 10 A max.
- Service voltage: 25 V/60 V
- Ueff test voltage: 1,5 kV
- Contact resistance: >2 m
- insulation resistance: >10¹⁰
- Temperature range: -40°C + 100°C
- DIN 40050 protection degree: IP 65 for coupled connectors
- Screw connection: 1,5mm²

- Sockets: thermoplastic containing fibre glass, UL list
- Contacts: copper alloy
- Contacts plated: silver
- Boxes: moulded alloy

