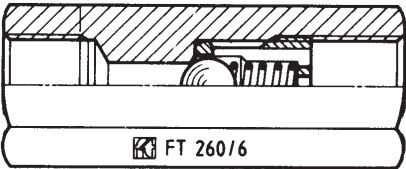
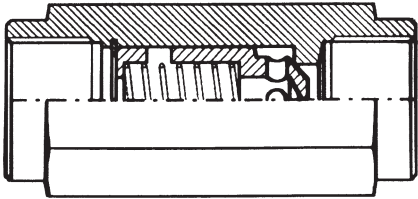




In-Line Check Valves

	Thread Size	PN BAR	BSP, or NPT THREADS			
			CODE	Price	CODE	Price
FT 260/6 Ball type closure Black carbon steel Temp: -20°C to 100°C Cracking pressure 0.35 Bar or 4.5 Bar 					FT 2260/6	
			CARBON STEEL/BUNA		STAINLESS/VITON	
	1/8"	350	FT260/6-G18	8.55		
	1/4"	350	FT260/6-G14	6.75	FT2260/6-G14	22.93
	3/8"	350	FT260/6-G38	8.48	FT2260/6-G38	27.40
	1/2"	350	FT260/6-G12	11.74	FT2260/6-G12	34.90
	3/4"	350	FT260/6-G34	15.59	FT2260/6-G34	49.85
	1"	350	FT260/6-G100	26.77	FT2260/6-G100	84.19
					For NPT add 20%	
ATR SERIES Metal to metal seal Yellow carbon steel Cracking pressure: 0.35/1.5/2.5/4/6 Bar 					ATR-X AISI316	
			CARBON STEEL/BUNA			
	1/8"	300	ATR-G18	8.19	ATR-X-G14	25.48
	1/4"	300	ATR-G14	7.20	ATR-X-G38	27.70
	3/8"	300	ATR-G38	7.76	ATR-X-G12	35.45
	1/2"	300	ATR-G12	8.86	ATR-X-G34	62.03
	3/4"	300	ATR-G34	12.74	ATR-X-G100	79.95
	1"	300	ATR-G100	17.72	ATR-X-G114	127.60
	1 1/4"	300	ATR-G114	46.52	ATR-X-G112	177.23
	1 1/2"	300	ATR-G112	55.39	ATR-X-G200	300.00
2"	200	ATR-G200	106.34			
				For NPT add 20%		

Hose Burst Coupling

	Thread Size	PN BAR	BSP, or NPT THREADS			
			CODE	Price	CODE	Price
HBC SERIES (Complete) Hose burst coupling (Parachute valve) 					<u>Closing Flow</u>	
	1/4"	300	HBC-G14	7.76	10 to 20 L/min.	
	3/8"	300	HBC-G38	8.31	15 to 45 L/min.	
	1/2"	300	HBC-G12	10.53	20 to 75 L/min.	
	3/4"	300	HBC-G34	16.62	30 to 120 L/min.	
	1"	300	HBC-G100	23.74	40 to 200 L/min.	
ACV SERIES Cartridge for HBC 	1/4"	300	ACV-14	3.48		
	3/8"	300	ACV-38	4.06		
	1/2"	300	ACV-12	4.64		
	3/4"	300	ACV-34	8.12		
	1"	300	ACV-100	10.44		