






General Purpose Brass Ball Valves - Short Thread



Nickel Plated Brass, PTFE Seals. Temperature Range: -15°C to +150°C

BV2-090 IDEAL Full bore	LW Bore	Thread Size	PN BAR	BSP or NPT THREADS			
				CODE	Price	CODE	Price
	10	1/4"	50	BV2-090-G14	1.70	BV2-090-N14	1.70
	10	3/8"	50	BV2-090-G38	1.75	BV2-090-N38	1.75
	15	1/2"	50	BV2-090-G12	2.00	BV2-090-N12	2.00
	20	3/4"	40	BV2-090-G34	2.85	BV2-090-N34	2.85
	25	1"	40	BV2-090-G100	4.34	BV2-090-N100	4.34
	32	1 1/4"	30	BV2-090-G114	7.00	BV2-090-N114	7.00
	40	1 1/2"	30	BV2-090-G112	9.95	BV2-090-N112	9.95
	50	2"	25	BV2-090-G200	15.00	BV2-090-N200	15.00
	65	2 1/2"	18	BV2-090-G250	35.00		
	80	3"	16	BV2-090-G300	55.00		
100	4"	14	BV2-090-G400	90.00			
BV2-092 IDEAL Full bore 	10	1/4"	50	BV2-092-G14	1.70	BV2-092-N14	1.70
	10	3/8"	50	BV2-092-G38	1.75	BV2-092-N38	1.75
	15	1/2"	50	BV2-092-G12	2.00	BV2-092-N12	2.00
	20	3/4"	40	BV2-092-G34	2.85	BV2-092-N34	2.85
	25	1"	40	BV2-092-G100	4.34	BV2-092-N100	4.34
BV2-091 IDEAL Full bore 	10	1/4"	50	BV2-091-G14	1.90		
	10	3/8"	50	BV2-091-G38	1.95		
	15	1/2"	50	BV2-091-G12	2.20		
	20	3/4"	40	BV2-091-G34	3.20		
	25	1"	40	BV2-091-G100	4.75		
	32	1 1/4"	30	BV2-091-G114	7.75		
	40	1 1/2"	30	BV2-091-G112	10.80		
	50	2"	25	BV2-091-G200	16.50		
BV2-093 IDEAL Full bore Male/female 'T' handle 	10	1/4"	50	BV2-093-G14	1.90		
	10	3/8"	50	BV2-093-G38	1.95		
	15	1/2"	50	BV2-093-G12	2.20		
	20	3/4"	40	BV2-093-G34	3.20		
	25	1"	40	BV2-093-G100	4.75		
	32	1 1/4"	30	BV2-093-G114	7.75		




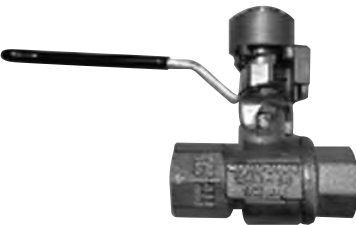
NEW - Mini Ball Valves

BVM-125 fem/fem 	Thread	Dash Size	BAR	CODE	Price
		1/8"		15	BVM-125-G18
	1/4"		15	BVM-125-G14	1.45
	3/8"		15	BVM-125-G38	1.45
	1/2"		15	BVM-125-G12	1.60
	3/4"		15	BVM-125-G34	2.70
BVM-126 male/fem 	Thread	Dash Size	BAR	CODE	Price
	1/8"		15	BVM-126-G18	1.45
	1/4"		15	BVM-126-G14	1.50
	3/8"		15	BVM-126-G38	1.50
	1/2"		15	BVM-126-G12	1.70
	3/4"		15	BVM-126-G34	2.70

Brass Gate Valves

GVL-155 Gate Valve - PN10 - Light 	Thread Size	Dash Size	CODE LIGHT	Price	CODE HEAVY	Price
		1/4"		GVL-155-G14	2.00	
	3/8"		GVL-155-G38	2.00		
	1/2"		GVL-155-G12	1.80	GVH-157-G12	2.20
	3/4"		GVL-155-G34	2.00	GVH-157-G34	3.00
	1"		GVL-155-G100	2.60	GVH-157-G100	4.00
	1¼"		GVL-155-G114	3.90	GVH-157-G114	5.80
	1½"		GVL-155-G112	5.20	GVH-157-G112	7.80
	2"		GVL-155-G200	7.50	GVH-157-G200	11.00
	2½"		GVL-155-G250	15.00	GVH-157-G250	17.60
	3"		GVL-155-G300	22.00	GVH-157-G300	23.40
	4"		GVL-155-G400	40.00	GVH-157-G400	41.60
			TO BE DISCONTINUED			
GVH-157 Gate Valve - PN20 - Heavy 	Thread Size	Dash Size	CODE LIGHT	Price	CODE HEAVY	Price
	1/2"					GVH-200-N12
	3/4"				GVH-200-N34	4.00
	1"				GVH-200-N100	5.00
	1¼"				GVH-200-N114	8.00
	1½"				GVH-200-N112	10.00
	2"				GVH-200-N200	15.00
	2½"				GVH-200-N250	30.00
	3"				GVH-200-N300	50.00
	4"				GVH-200-N400	80.00
GVH-200-NPT PN20 Heavy						

Brass Ball Valves - 3-Way & Lockable





	LW Bore	Thread Size	PN BAR	CODE	Price	CODE	Price
BV3-128 3-WAY 'L' or 'T' ported 	11	1/4"	30	BV3-128-G14L	13.00	BV3-128-G14T	15.00
	11	3/8"	30	BV3-128-G38L	13.00	BV3-128-G38T	15.00
	15	1/2"	30	BV3-128-G12L	14.00	BV3-128-G12T	16.00
	20	3/4"	30	BV3-128-G34L	20.00	BV3-128-G34T	20.00
	25	1"	16	BV3-128-G100L	29.00	BV3-128-G100T	29.00
	32	1 1/4"	10	BV3-128-G114L	43.76	BV3-128-G114T	43.76
	40	1 1/2"	10	BV3-128-G112L	64.25	BV3-128-G112T	64.25
	50	2"	10	BV3-128-G200L	93.86	BV3-128-G200T	93.86
Temperature range: -15°C to -150°C							
BV3-3110 		1/4"	30	BV3-3210-G14L	POA	BV3-3110-G14T	POA
		3/8"	30	BV3-3210-G38L	POA	BV3-3110-G38T	POA
		1/2"	30	BV3-3210-G12L	POA	BV3-3110-G12T	POA
		3/4"	30	BV3-3210-G34L	POA	BV3-3110-G34T	POA
		1"	16	BV3-3210-G100L	POA	BV3-3110-G100T	POA
		1 1/4"	10	BV3-3210-G114L	POA	BV3-3110-G114T	POA
		1 1/2"	10	BV3-3210-G112L	POA	BV3-3110-G112T	POA
		2"	10	BV3-3210-G200L	POA	BV3-3110-G200T	POA
	3"	10	BV3-3210-G300L	POA	BV3-3110-G300T	POA	
BV2-144 Lockable hose end ball bibcock 	15	1/2"	50	BV2-144-G12	3.65		
	20	3/4"	40	BV2-144-G34	4.10		
LBV-1710-LD  Lockable Ball Valve		1/4"		1710-LD-G14	P.O.A.		
		3/8"		1710-LD-G38			
		1/2"		1710-LD-G12			
		3/4"		1710-LD-G34			
		1"		1710-LD-G100			
		1 1/4"		1710-LD-G114			
		1 1/2"		1710-LD-G112			
		2"		1710-LD-G200			
	3"		1710-LD-G300				

Check Valves - Brass - Stainless - Plastic

AISI 304 Plate, Nitrile Cover, Stainless 18/8 Spring

SPC-103 YORK - BRASS Spring loaded	Thread Size	PN BAR	CODE	Price	CRACKING PRESSURE BAR	
					Minimum	Maximum
To be discontinued. Available while stocks last	3/8"	12	SPC-103-G38	1.75	0.070	0.230
	1/2"	12	SPC-103-G12	1.70	0.070	0.230
	3/4"	12	SPC-103-G34	2.25	0.070	0.280
	1"	12	SPC-103-G100	2.85	0.080	0.380
	1 1/4"	10	SPC-103-G114	4.16	0.120	0.530
	1 1/2"	10	SPC-103-G112	6.00	0.180	0.680
	2"	10	SPC-103-G200	8.50	0.100	0.400
	2 1/2"	8	SPC-103-G250	16.95	0.129	0.680
	3"	8	SPC-103-G300	23.67	0.180	1.280
4"	8	SPC-103-G400	41.70	0.130	1.000	
SPH-100 EUROPA - BRASS Spring loaded	3/8"	25	SPH-100-G38	2.30	0.080	0.300
	1/2"	25	SPH-100-G12	2.30	0.080	0.300
	3/4"	25	SPH-100-G34	2.96	0.130	0.340
	1"	25	SPH-100-G100	4.05	0.190	0.450
	1 1/4"	18	SPH-100-G114	6.32	0.240	0.500
	1 1/2"	18	SPH-100-G112	8.60	0.310	0.800
	2"	18	SPH-100-G200	13.10	0.400	0.950
	2 1/2"	12	SPH-100-G250	29.88	0.460	1.250
	3"	12	SPH-100-G300	45.00	0.550	1.400
4"	12	SPH-100-G400	75.25	0.650	1.650	
Temperature range: Air -20°C to 110°C, Gas -20°C to 80°C, Water 0°C to 90°C						
SPX-105 - STAINLESS STEEL, VITON Spring loaded	1/4"	16	SPX-105-G14	22.15	40.78	Cracking Pressure 0.05 BAR
	3/8"	25	SPX-105-G38	22.15	40.78	
	1/2"	25	SPX-105-G12	22.15	40.78	
	3/4"	25	SPX-105-G34	32.13	55.92	
	1"	25	SPX-105-G100	37.66	64.08	
	1 1/4"	18	SPX-105-G114	50.95	92.04	
	1 1/2"	18	SPX-105-G112	57.60	97.86	
	2"	18	SPX-105-G200	99.69	191.06	
	2 1/2"	12	SPX-105-G250	186.40	276.10	
3"	12	SPX-105-G300	270.28	396.10		
4"	12	SPX-105-G400	415.90	720.00		
SSF-102 FILTER	3/8"		SSF-102-G38	1.00	Use this filter in conjunction with York/Europa valves to obtain a foot valve. Mesh: AISI 304L Threaded end: Nylon 66. Mesh holes ø 12mm Microns 1200 Number of holes 30/cm ²	
	1/2"		SSF-102-G12	1.04		
	3/4"		SSF-102-G34	1.18		
	1"		SSF-102-G100	1.40		
	1 1/4"		SSF-102-G114	1.75		
	1 1/2"		SSF-102-G112	2.22		
	2"		SSF-102-G200	2.90		
	2 1/2"		SSF-102-G250	6.16		
	3"		SSF-102-G300	7.09		
	4"		SSF-102-G400	9.97		

Brass Ball Valves - Check Valve & Y-Strainers

		Thread Size	PN BAR	CODE	Price					
SCH-130 BRASS Swing Check Valve 		3/8"	12	SCH-130-G38	2.50					
		1/2"	12	SCH-130-G12	2.35					
		3/4"	12	SCH-130-G34	3.10					
		1"	12	SCH-130-G100	4.50					
		1¼"	10	SCH-130-G114	6.25					
		1½"	10	SCH-130-G112	7.85					
		2"	10	SCH-130-G200	11.20					
		2½"	8	SCH-130-G250	24.00					
		3"	8	SCH-130-G300	33.20					
	4"	8	SCH-130-G400	60.56						
YST-192 BRASS/BRONZE Y-Strainer 		1/4"	16	YST-192-G14	1.80	Nominal diameter	10-15 20-25	32-40 50	65-80 100	
		3/8"	16	YST-192-G38	1.80	MICRON	400	500	600	
		1/2"	16	YST-192-G12	1.80	Holes pitch (mm)	1.5	2	2.5	
		3/4"	16	YST-192-G34	2.65	Hole diameter (mm)	0.40	0.47	0.53	
		1"	16	YST-192-G100	3.98	Holes /cm²	150	80	60	
		1¼"	16	YST-192-G114	6.10	Holes % on total surface	33%	43%	43%	
		1½"	16	YST-192-G112	8.20					
		2"	16	YST-192-G200	14.00					
		2½"	16	YST-192-G250	28.00					
		3"	16	YST-192-G300	40.00					
		4"	16	YST-192-G400	80.00					
	YSS-800 STAINLESS STEEL Y-Strainer 		1/4"	50	YSS-800-G14	30.24	MESH DATA			
			3/8"	50	YSS-800-G38	30.24	ø of holes 1mm			
		1/2"	50	YSS-800-G12	30.24	Distance between holes 2mm				
		3/4"	50	YSS-800-G34	37.22					
		1"	50	YSS-800-G100	48.84					
		1¼"	50	YSS-800-G114	61.70					
		1½"	50	YSS-800-G112	88.23					
		2"	50	YSS-800-G200	139.57					
BFV-140 Integral foot valve 		1/2"	10	BFV-140-G12	2.60					
		3/4"	10	BFV-140-G34	2.75					
		1"	10	BFV-140-G100	3.15					
		1¼"	8	BFV-140-G114	4.42					
		1½"	8	BFV-140-G112	5.90					
		2"	8	BFV-140-G200	8.10					
		2½"	6	BFV-140-G250	14.65					
		3"	6	BFV-140-G300	19.30					
		4"	6	BFV-140-G400	33.26					

Brass Ball Valves - Various

PRL-143


Pressure Reducing Valve



Size	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"
A (mm)	77	85	89	125	130	138	148	177
B (mm)	120	150	160	220	220	250	256	285
Working pressure Kg/cm ² - bar	25	25	25	25	25	25	25	25
Working pressure psi	360	360	360	360	360	360	360	360
Price	13.82	18.98	21.47	48.83	55.44	87.23	154.85	189.68

Max. temperature: 130°C
Max. inlet pressure: 25 bar
Outlet pressure 0.5 to 6 bar.
Outlet pressure gauge connections 1/4" on both sides.

Threads: ISO228
(equivalent to DIN259 and BS2779)




PRL-360

Pressure Reducing Valve



Size	3/8"	1/2"	3/4"
A (mm)	60	60	60
B (mm)	93	93	93
C (mm)	26	26	30
Working pressure Kg/cm ² - bar	15	15	15
Working pressure psi	220	220	220
Price	6.44	6.44	6.57




PRL-361

Pressure Reducing Valve



Size	3/8"	1/2"	3/4"
A (mm)	60	60	60
B (mm)	110	110	110
C (mm)	26	26	31
Working pressure Kg/cm ² - bar	15	15	15
Working pressure psi	220	220	220
Price	7.84	7.84	7.84

Outlet pressure gauge connections 1/4"



TFC-139

Tank filling cock



Size	3/8"	1/2"	3/4"
Price	2.50	2.50	5.10

HCO-280

Hose connector

BRASS



Size	3/4"x1/2"	1"x3/4"	1 1/4"x1"
Price	0.40	0.70	1.30




HCO-282

Hose connector

NYLON

Size	3/4"x1/2"	1"x3/4"
Price	0.20	0.40

Brass Ball Valves - Bibcock/Vented/Actuated

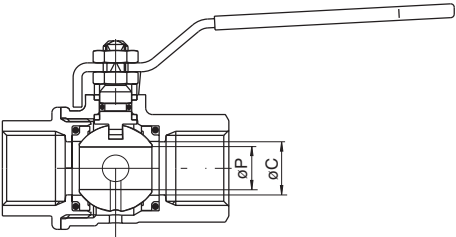BCH-178 Bibcock	Thread Size	PN BAR	CODE	Price	CODE	Price
	3/8"	15	BCH-178-G38	4.50		
	1/2"	15	BCH-178-G12	4.00		
	3/4"	15	BCH-178-G34	4.00		
	1"	15	BCH-178-G100	9.00		
AVE-194 Air Vent 	1/4"	15	AVE-194-G14	0.70		
BVV BRASS Ball Valve Vented 	1/4"	16	5110-14	10.00		
3/8"	16	5110-30	10.00			
1/2"	16	5110-12	10.00			
3/4"	16	5110-34	14.00			
1"	16	5110-100	20.00			